

# TROUBLESHOOTING GUIDE



## **Mobile** Welfare Unit

Instruction Document  
from **groundhog**

Version **1.9**

## RESOURCES:

# Training Videos

Videos from the **groundhog** Mobile Training course are available to view online at [www.groundhog.co.uk](http://www.groundhog.co.uk)



# Contents

General Safety	<b>4</b>
.....	
If the hydraulics are not working/ "I can't lift or lower the unit..."	<b>5</b>
.....	
No 12 volt power to appliances...	<b>7</b>
.....	
No 230 volt power to appliances...	<b>8</b>
.....	
If there is no power to inverter powered socket?	<b>9</b>
.....	
If there is no hot water from taps in canteen/toilet...	<b>11</b>
.....	
If water is constantly running from canteen/toilet taps...	<b>12</b>
.....	
If there is no water running from canteen/toilet taps...	<b>13</b>
.....	
If the Webasto heating system is not working...	<b>14</b>
.....	
How to reset the heater...	<b>15</b>
.....	
If the generator does not start...	<b>16</b>
.....	

## WELCOME:

# General Safety

Before using a Groundhog unit and to avoid personal injury:

**Wear suitable personal protective equipment** whenever making adjustments to the unit.



**Carefully inspect** the Groundhog before towing or before use.



**Make sure you are aware of all safety requirements** and that this equipment is suitable for the location.



You **MUST** perform a **risk assessment** before siting this equipment to ensure your safety and the safety of others.



This equipment must not be moved, set up, used or dismantled by persons who are under the influence of **alcohol** or **drugs**.



Do not use this equipment if you are **tired** or **unwell**.



**Do not wear loose jewellery or clothing** that may get in the way or become trapped in the mechanism.



If there is any doubt about the condition of the unit or if there is anything you do not understand **DO NOT CONTINUE**.

Please contact the supplier for advice.

## TROUBLESHOOTING:

If the hydraulics are not working/  
“I can’t lift or lower the unit...”

### 1 Check for audible sounds


If sounds are heard when operating the ‘UP’ or ‘DOWN’ buttons of the hydraulic remote, this means that the battery has charge.

Please go to step 3.



### 2 Check battery level

Check battery level, if lighting in the canteen area is not illuminated then start the generator and leave to run for the full 3 hour cycle. You should be able to operate the hydraulics after 30 minutes of the generator running.

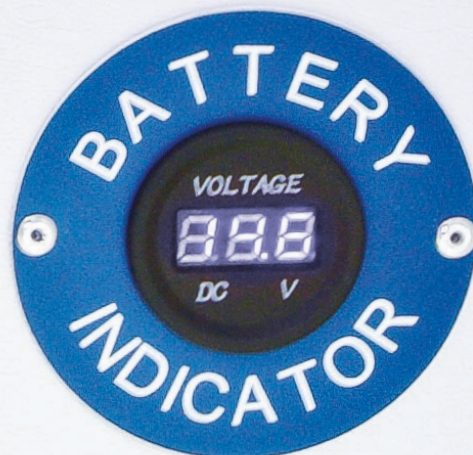

FUSION & FUSION PULSE ONLY

### 3 Check wander lead/ hydraulic remote plug connection

Ensure the wander lead/ hydraulic remote plug is fully connected to the front socket.

(continued on following page)




## TROUBLESHOOTING:

If the hydraulics are not working/  
“I can’t lift or lower the unit...” (continued)

### 4 Inspect all connections on the hydraulic power pack

Inspect all connections on the hydraulic power pack which is located under the seating area on the door side of the canteen area.

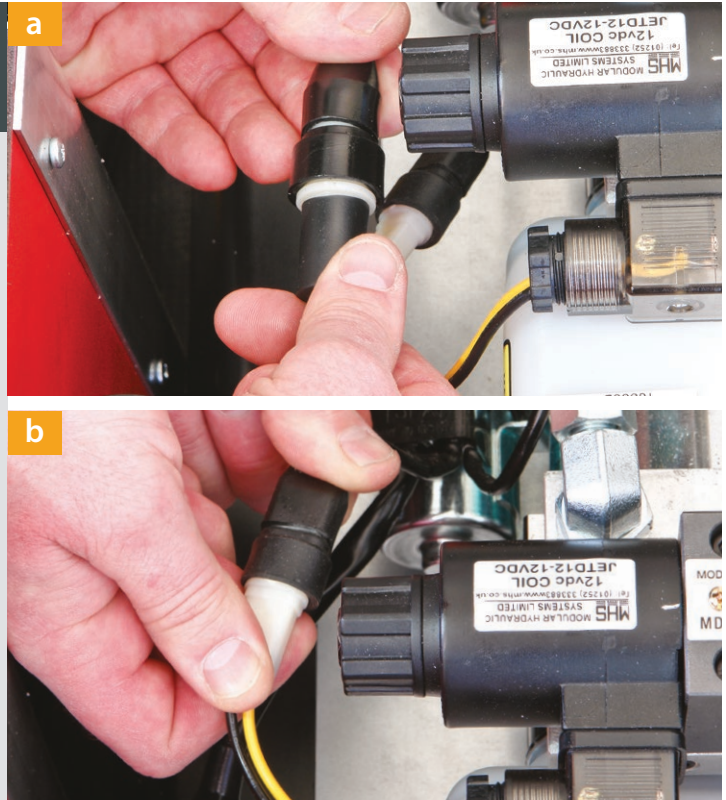

### 5 Check for oil leaks

Carry out a quick check around the area of the hydraulic rams to ensure there are no oil leaks.



**This check is only to be carried out when unit is on wheels and is suitably supported.**


## TROUBLESHOOTING:

# No 12 volt power to appliances...

Are LED lights illuminated?

YES

If lights within the unit are illuminated then please check the fuses which are located under the seating area behind the table.

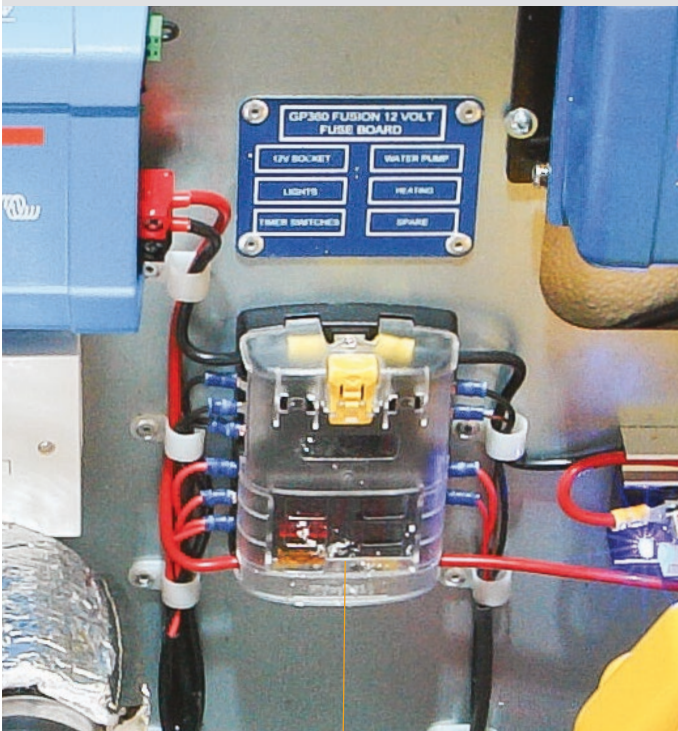

12V fuse board

NO

Start the generator.  
After around 30 seconds all lights should illuminate.



### 6kVA generator

Press the ON/OFF button then press and hold the start button until the engine is running.



Run generator for  
**full 3 hour cycle**

It is important that the generator is then left to run for its full 3 hour cycle to charge the battery.

# No 230 volt power to appliances...

- 
- A close-up photograph of a blue and white ROGA 1.5 cable gland. The blue plastic housing features a locking lever on the left side. A label on the lever reads: "ROGA 1.5", "ROGA 1.5", "ROGA 1.5", "ROGA 1.5", "ROGA 1.5", "ROGA 1.5", "ROGA 1.5", "ROGA 1.5", "ROGA 1.5", "ROGA 1.5". The white plastic body has two screws on the right side. The word "CLOSE" is embossed on the blue housing. The gland is mounted on a white surface.


- 
- MCB's      Test button      RCD

## TROUBLESHOOTING:

### If there is no power to inverter powered socket...

(continued on following page)

If lights within the unit are illuminated then please **check the inverter** which is located under the seating area behind the table in the canteen area:

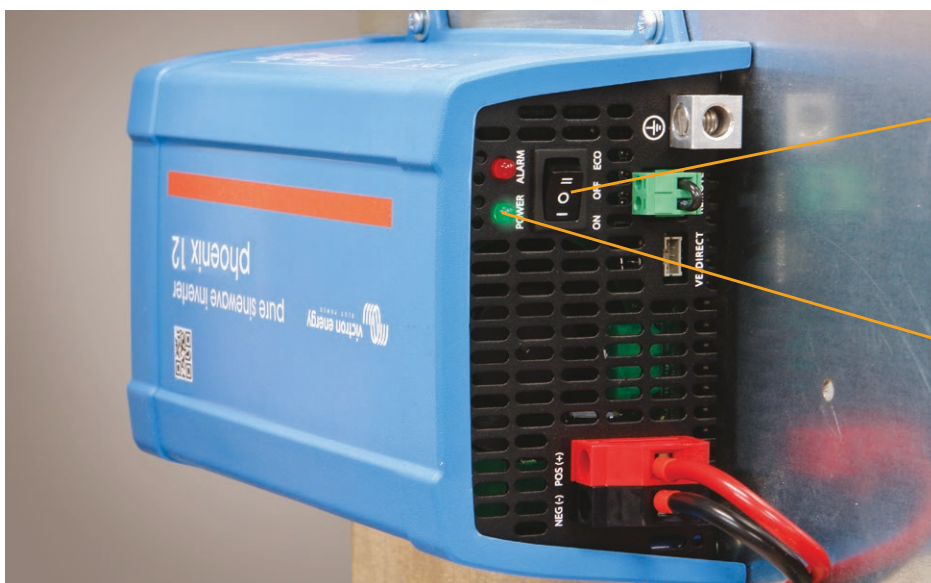

Toggle switch in 'ON' position

Green LED light signifying that inverter is in good working order



Fully located plug

- 1 Ensure the toggle switch is in the 'ON' position
- 2 The plug is fully located. There should also be a **green LED light** illuminated to signify that inverter is in good working order.

## TROUBLESHOOTING:

### If there is no power to inverter powered socket...

(continued)

If inverter shows a **red LED light**


If the inverter is showing a **red LED light** this signifies the inverter has been overloaded.



- 1 Remove the appliance from the inverter powered socket



- 2 Turn toggle switch on inverter to the 'OFF' position.

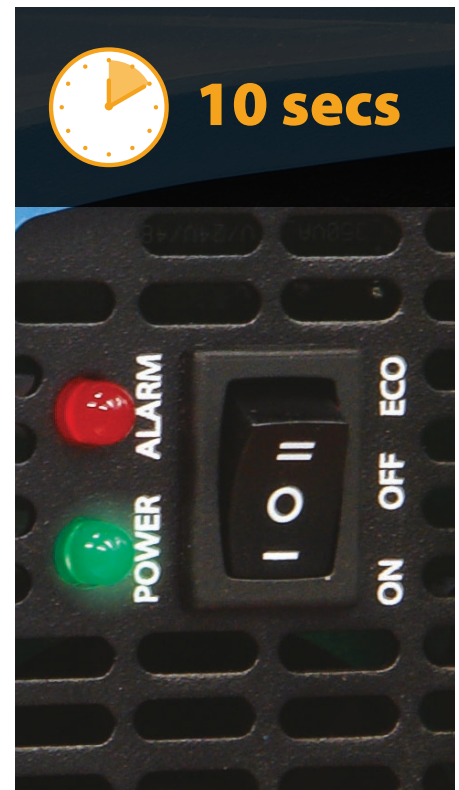

- 3 After 10 seconds, turn the toggle switch back to the 'ON' position.

- 4 This will then reset the inverter for further use.

#### IMPORTANT NOTE:

If an appliance trips the inverter then that appliance requires more power than the inverter can produce, so an alternative power source should be used.

## TROUBLESHOOTING:

# If there is no hot water from taps in canteen/toilet...

1

Ensure generator is running and has been for around 10 - 15 minutes.



2

Ensure the switched spur for water heater is in the 'ON' position.



2

Check selector switch is in position 2.  
(Standard units only.)



3

Check all MCB's and the RCD in the consumer unit above the worktop are in the up position.



4

Check to see if the amber LED light on the water heater is illuminated, if not then it may be the 13amp fuse in the switched spur which requires changing.





5

Check the mixer valve located by the water heater has not been turned fully to cold.



## TROUBLESHOOTING:

If water is constantly running from canteen/toilet taps...

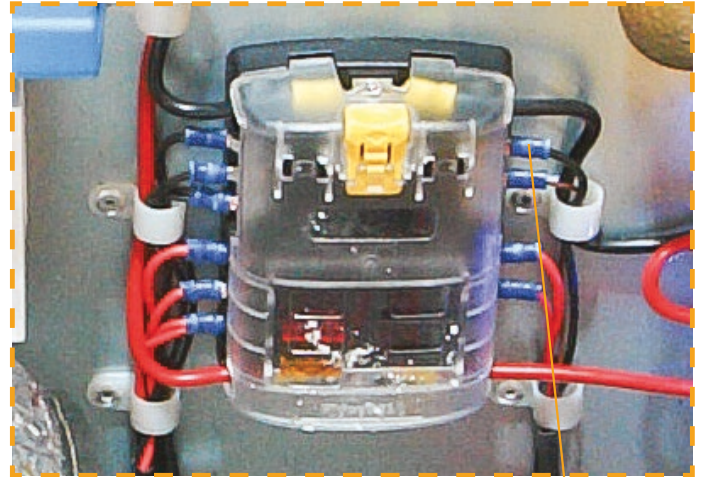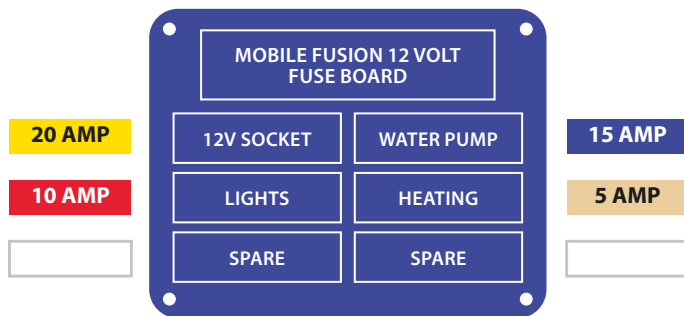

Water pump fuse



- Remove the fuses for both the water pump and timer switches in the 12 volt fuse board
- After 10 seconds replace both fuses and retest.

This procedure only applies to units manufactured **prior to November 2018.**

## TROUBLESHOOTING:

If there is no water running from canteen/toilet taps...

NO

Is water pump running?

YES

1





Check battery level or ensure canteen lights are illuminated.

1



Check water level in water butt under sink in canteen area.


2

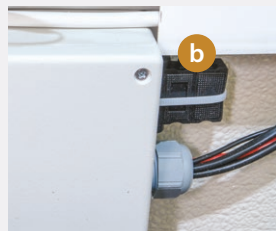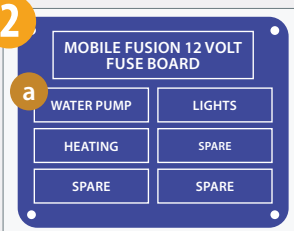

Check fuses located under the seating area behind the table in the canteen area:

- a. Water pump - 15 Amp blade fuse
- b. Foot pedals - 5 Amp blade fuse


2

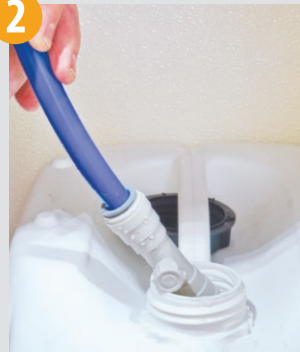

Ensure the non-return valve connected to the blue water pipe in the water butt is present.

2

Standard units only

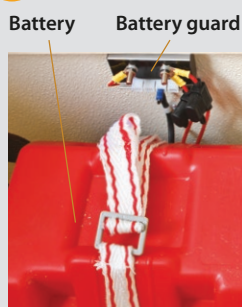

- Check fuse situated inside battery box. Battery guard LED light should be illuminated.



- Check foot pedal fuse located under the seating area below window in the canteen area.

3



Units manufactured prior to March 2019.




Units manufactured after March 2019.

Check inline filter for any visual signs of leakage or damage to casing.

## TROUBLESHOOTING:

# If the Webasto heating system is not working...

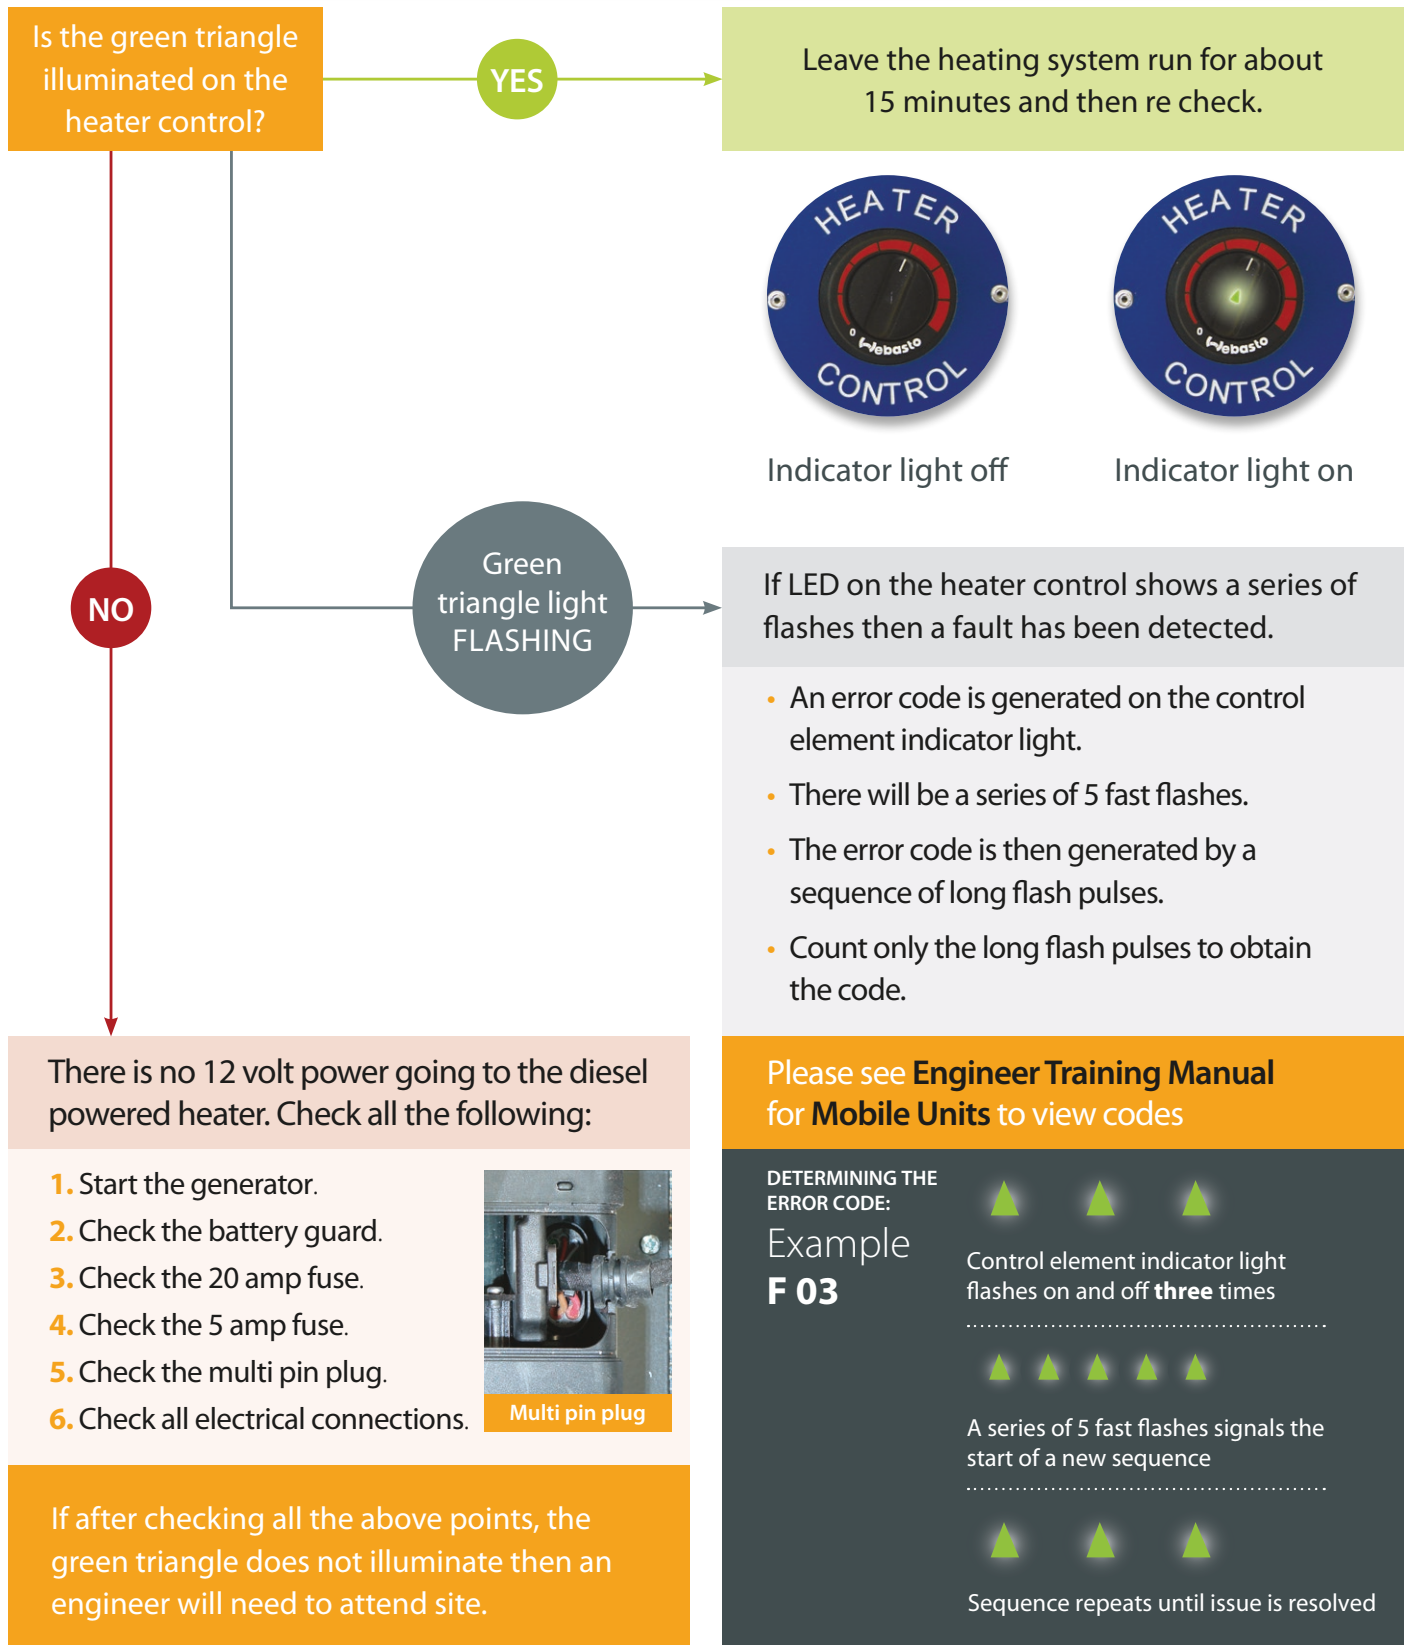

## TROUBLESHOOTING:

# How to reset the heater...

## NOTE

Prior to resetting any faults please record the error code for future reference then start the generator to ensure there is sufficient diesel and battery power for the heating to run.

1



Locate the heater control on the control panel in the canteen area.

2




Turn heating control to the 'ON' position.

3



20 amp fuse + -

Locate the 130 amp hour battery situated under the seating area behind the table.

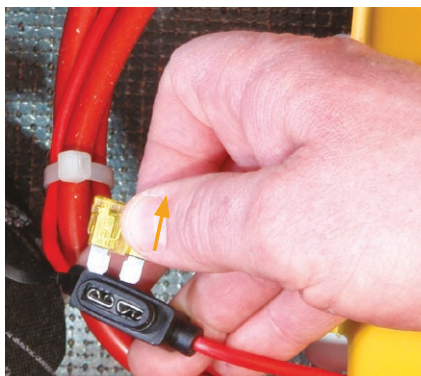


Remove the 20 amp fuse from the inline fuse holder on positive side of the 130 amp hour battery.

4



Turn heating control to the 'OFF' position.

5

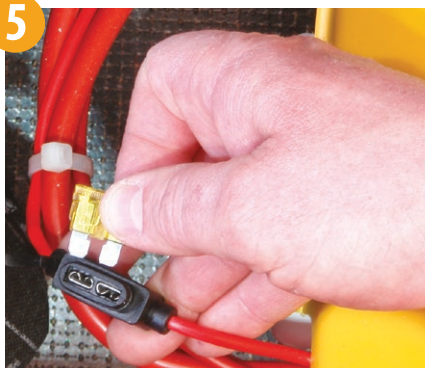

Replace the 20 amp fuse to the inline fuse holder on the positive side of the 130 amp hour battery.

6




Turn heating control to the 'ON' position.

It may be necessary to run this sequence a number of times to cancel all faults stored on the heater. If after clearing all faults the heating system still does not work it is recommended an engineer is contacted.

## TROUBLESHOOTING:

# If the generator does not start...

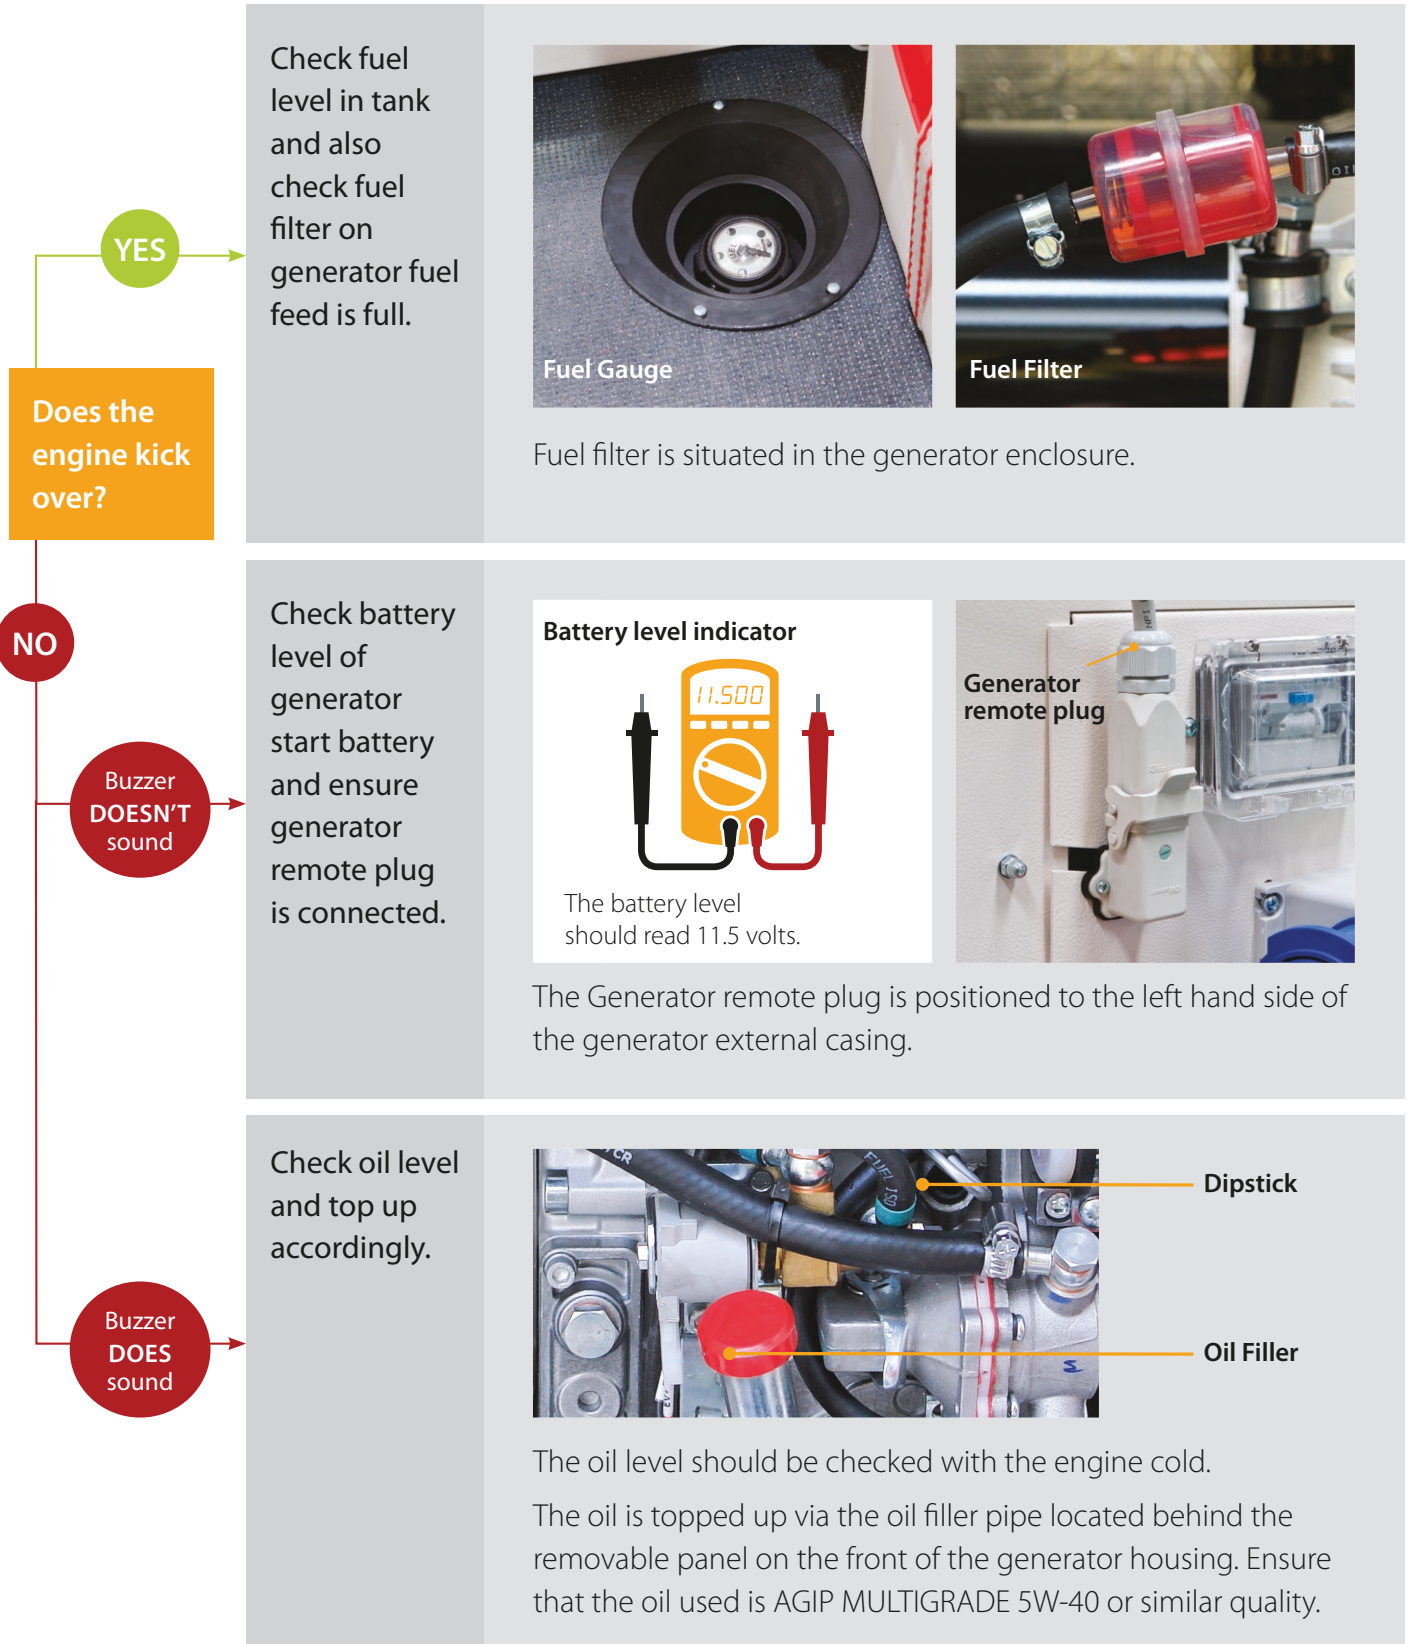



**Tel** 01639 641166

**Email** parts@groundhog.co.uk

**www.groundhog.co.uk**

Version 1.9 | 01/25

Copyright ©2025 Groundhog UK Limited. All rights reserved.

No part of this material may be reproduced in any form  
by any means without the express written permission of Groundhog UK Limited.

\* Weights and sizes shown may vary slightly. Groundhog reserve the right to change specification without prior notice.